

New Tools at FOP

Insertion-Extraction Tool IET




The IET-Tool inserts and extracts fiber optic connectors in high density patch panels. It works with LC and SC Simplex and Duplex Connectors as well as MU and MTRJ. Suitable for left or right hand operation.

Dimension: L x W 22,3cm x 7cm


Weight: 100g

Ordernumber: IET

locating

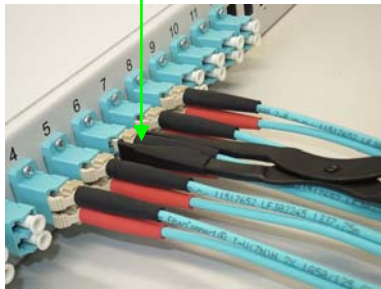

extraction

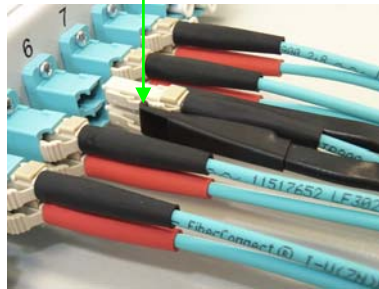


locating at detail



Fiber Tube Scorer FTS



application



The FTS scores buffer tube sizes from 1,6 to 6,0 mm. Factory fixed hardened carbon steel blade requires no blade adjustment.

Dimension: L x W x H 9,5cm x 4cm x 1,5cm

Weight: 28g

Ordernumber: FTS



FOP Faseroptische Produkte GmbH
Datentechnik—Telekommunikation
Roßfelder Straße 36
74564 Crailsheim

Tel.: (07951)91 51-0
Fax: (07951)91 51-50
Email: info@FOP.de
Homepage: www.FOP.de